


Specifications

Current rating: 1A AC,DC(Per Pin)  
 Voltage rating: 200V AC,DC(Per Pin)  
 Temperature range: -40°C ~ +105°C  
 Contact resistance: 20mΩ Max.  
 Insulation resistance: 500MΩ Min.  
 Withstanding voltage: 500V AC/minute  
 \*Contact E.N for Details\*

Standards



Assembly layout

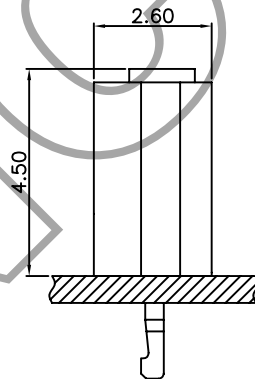

Ordering code

B1501 I X  
 ① ② ③

- ① Series No.
- ② T=Terminal
- ③ Pating:No=Tin G=Gold


B1501 H-NP  
 ① ② ③

- ① Series No.
- ② Housing Type:H=Housing
- ③ No. of circuits

## B1501-T — 1.50mm pitch 180° Crimp Terminal

### Reference Informations:

\*Used in E.N B1502H Series Housing

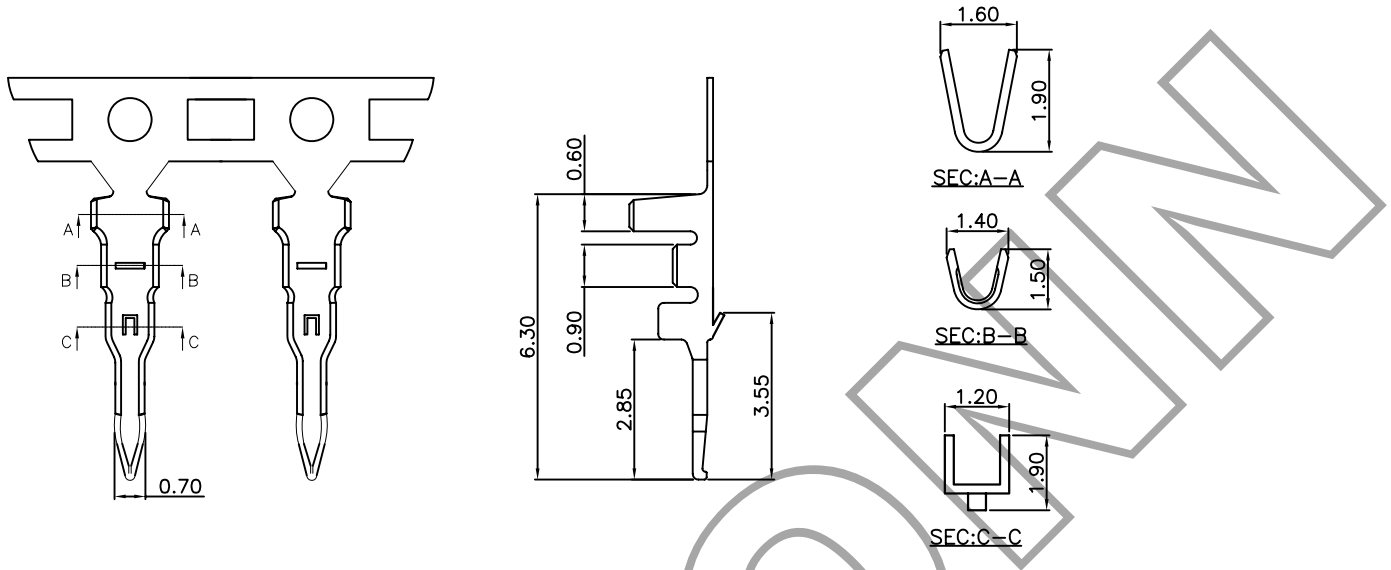

### Ordering Information & Specifications

Unit: mm





Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B1501-TP	AWG#28-#30	1.00mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

## B1501H — 1.50mm pitch 180° Housing

### Reference Informations:

\*Material: PA66 UL94V-0

\*Suitable E.N B1501 Series Terminal



### Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
B1501H-02P	1.50	4.00
B1501H-03P	3.00	5.50
B1501H-04P	4.50	7.00
B1501H-05P	6.00	8.50
B1501H-06P	7.50	10.00
B1501H-07P	9.00	11.50
B1501H-08P	10.50	13.00
B1501H-09P	12.00	14.50
B1501H-10P	13.50	16.00
B1501H-11P	15.00	17.50
B1501H-12P	16.50	19.00
B1501H-13P	18.00	20.50
B1501H-14P	19.50	22.00
B1501H-15P	21.00	23.50
B1501H-16P	22.50	25.00
B1501H-17P	24.00	26.50
B1501H-18P	25.50	28.00
B1501H-19P	27.00	29.50
B1501H-20P	28.50	31.00

Unit: mm